

Gripping head safety

Vertical protection of toolings.



Applicability


Machines AN70 and ER50 (depending on their floor surface).

Your advantages


- Ergonomics
 - Faster line restarts after stoppage.
- Savings
 - Preserves toolings.
- Quality
 - Increased detection sensitivity.

*Subject to detailed feasibility study for your own equipment
Contact your Service Account Manager for additional info*

BEFORE

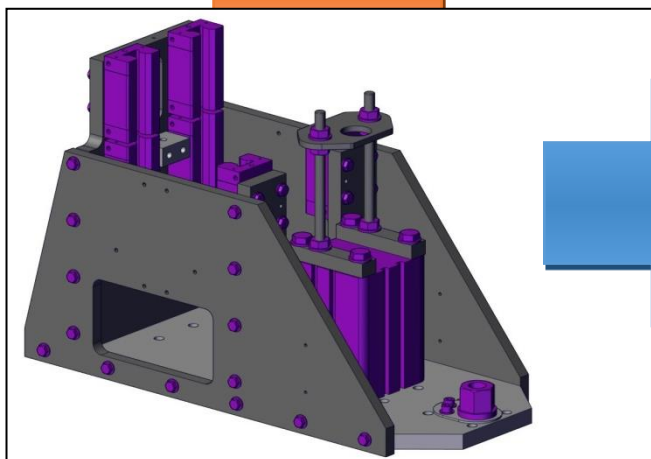

AFTER

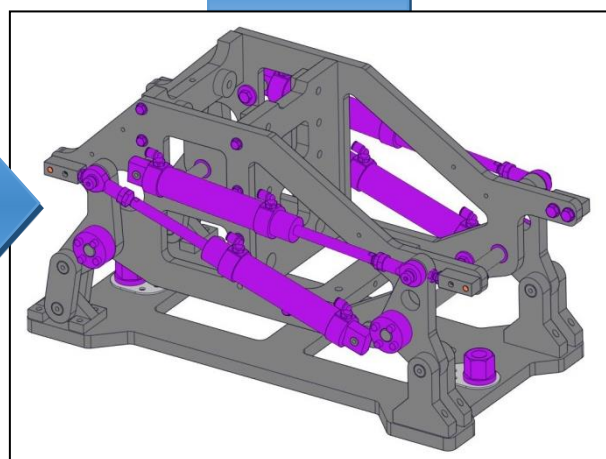

No contractual picture

Technical description

- Enables to detect resistances under the gripping head, no matter where the impact point is located.
- Protect toolings.
- Secure mechanical parts and ease production restart.
- Minimize production stoppages.
- Increase productivity.
- Preserve the integrity of both toolings and products.

Our guarantees

Spare parts covered by a warranty period of 12 months
Preservation of machine integrity
Certainty of ongoing OEM (Original Equipment Manufacturer) support
Compliance with applicable standards
Efficient after-sales service, spare parts, technical assistance
Installation by skilled technicians
Quality criteria acceptance

Conversion/delivery time & misc

Installation technical level: T3
Equipment downtime: 3 days
Delivery lead-time: 6 weeks
Training included