

PALLET INTERLAYER STORAGE



AVOID MULTIPLE MACHINES STOPS, OPTIMIZE PRE-LOAD MATERIAL AND IMPROVE OPERATOR'S SAFETY

Applicability

Available on our models PAL KOMBI and ROBOKOMBI.

See serial numbers below in green for applicable models

IAA	IAB	IAC	IAE	IAF	IBB	IBC	IBF	IBG	IBH	IBI	IBL	IBP	IBR	IBS	IBT	IBU	ICP	IDP
IDB	IDC	IDD	IDH	IDL	IDP	IDR	IDS	IDU	IDV	IEC	IES	IEU	IEV	IFC	IFS	IFU	IGC	IGU

Subject to detailed feasibility study for your own equipment
Contact your Service Account Manager for additional info

BEFORE



Technical description

Before, the interlayer storage unit was fixed to the floor. Pads were manually loaded/unloaded by the operator during a machine stop. The new configuration reduces machine stops, performing the interlayer storage system with 1 or 2 units whatever the pads size type. It is possible to use two units: First unit is used to feed the machine; second unit is ready outside to be easily preloaded with a new stack reducing machine stops. The module has adjustable guides for positioning each type of interlayer pads.

Your advantages


Safety & Ergonomics

- It increases the operator safety.

Efficiency

- It reduces the machine time stoppages and it will perform a better load process with two mobile units.
- In case of several pads sizes it is possible to set the adjustable guides for all the formats.

AFTER

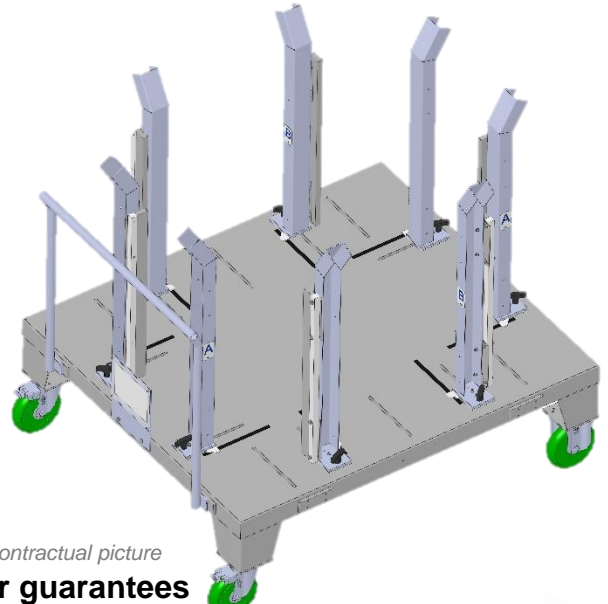

No contractual picture

Our guarantees

- Parts: 12 months
- Compliance with regulatory standards in force
- Constant support ensured
- Preserve the integrity of the machine
- Efficient After-sales service, spare parts, technical assistance
- Installation by skilled personnel

Conversion/delivery time & misc

- Level of complexity: EASY
- Machine downtime: 8H
- Delivery time (weeks): 6
- Need for training: N