

PNEUMATIC GRIPPERS



THE NEW PNEUMATIC GRIPPERS HAVE A MORE PRECISE GRIP AND A GREATER LIFE OF THE COMPONENTS.

Applicability


Available on our models INCAMATIC, DECAMATIC

See serial numbers below in green for applicable models

IAA	IAB	IAC	IAD	IAE	IAF	IBB	IBC	IBF	IBG	IBH	IBI	IBL	IBP	IBR	IBS	IBT	IBU	ICP
IDB	IDC	IDD	IDH	IDL	IDP	IDR	IDS	IDU	IDV	IEC	IES	IEU	IEV	IFC	IFS	IFU	IGC	IGU
DIGIPAL	PP4200	PP4300	PP4350	PP4600	PP4700	PP4750	PP4900	PP5100	PP3300	PalAccess								
PV1000	DPF2500	PV200	PV410	ROBOACCESS	COBOACCESS	DPV410	EMBOX PAL	TI	TPA	MANUT PAL								

Subject to detailed feasibility study for your own equipment
Contact your Service Account Manager for additional info

BEFORE

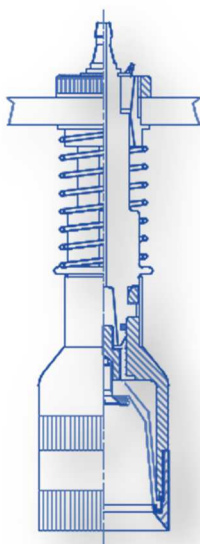

Technical description

The old device has a pneumatic functioning.
The TPE membrane is air activated by a compression on the bottleneck.
It requires frequent membrane's replacement.

With the new device there is no membrane installed but « Fingers » with a pneumatic/mechanical functioning.
The grip is on the bottleneck.
It is more resistant to impact with bottle.
Less maintenance required and longer lifetime.
Wide range grip diameter (ID= 35-42-48; OD= 52.5 - 58-65-72 mm).
The bottleneck must be evaluated first (the application range has some limitation).
Must verify the crate pockets centre position versus the gripper centreline.

Your advantages


Maintenance

- New pneumatic grippers improve lifetime of the device.
- Are more resistant to impact.
- Less maintenance.
- Reduction in wear of the capping components.

Product Quality

- Precise bottle grip and release

AFTER

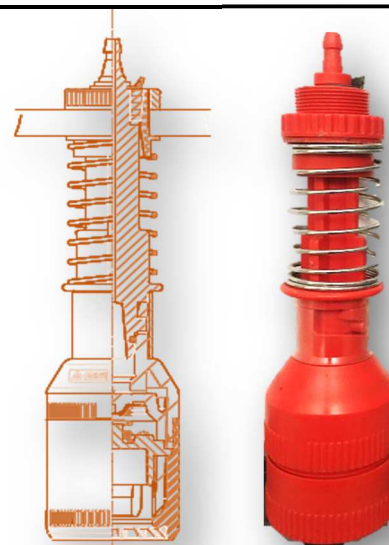

Our guarantees

- Parts: 12 months
- Compliance with regulatory standards in force
- Constant support ensured
- Preserve the integrity of the machine
- Efficient After-sales service, spare parts, technical assistance
- Installation by skilled personnel

Conversion/delivery time & misc

- Level of complexity: EASY
- Downtime (days): 1-2
- Delivery time (weeks): 8
- Need for training: N

Performance
through
Understanding

